


Harford Walk-in Structural Flooring



Harford

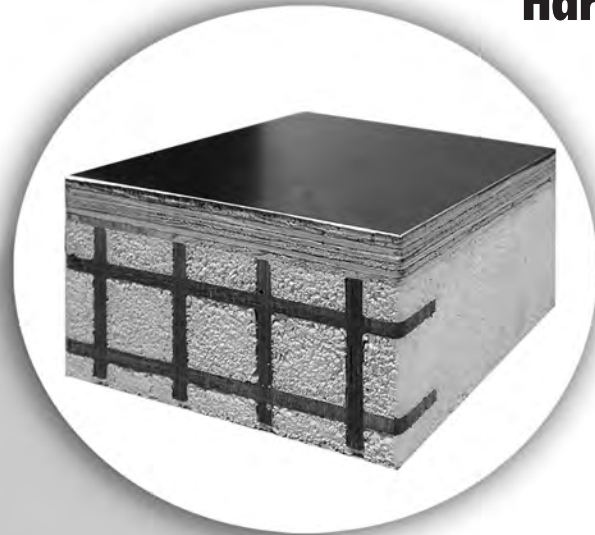

- Technically superior structural flooring panel
- Withstands loads up to 5,000 lbs per square foot
- Additional overlay is not required to achieve 5,000 lbs per square foot
- Impact resistant - can withstand a dropped keg from four feet
- 12" on-center structural grid construction

- Designed to endure years of use
- Flooring can be installed over any level surface
- Ideal solution for retrofit and remodeling applications
- Available in five metal finishes



ISO 9001 Quality System Certified

High-Quality Walk-ins

*Walk-in Coolers & Freezers • Refrigeration Systems
Refrigerated Warehouses*

Manitowoc
Foodservice Group

Harford Walk-in Structural Flooring

Available Finishes


- .100 smooth aluminum
- 16 gauge stainless steel
- .100 diamond tread plate
- 16 gauge smooth galvanized
- 14 gauge smooth galvanized

Specifications

Withstands load up to 5,000 pounds per square foot in stationary or rolling stock.

- Fiberglass reinforced plastic is on 12" centers; it is framed around locks if necessary.
- Tough outer skin glued to plywood.
- 3/4" plywood (not OSB board) distributes weight evenly over the fiberglass reinforced plastic.
- Fiberglass reinforced plastic foamed and glued in place.
- Durable bottom skin completes the design.

Structural Floor Detail

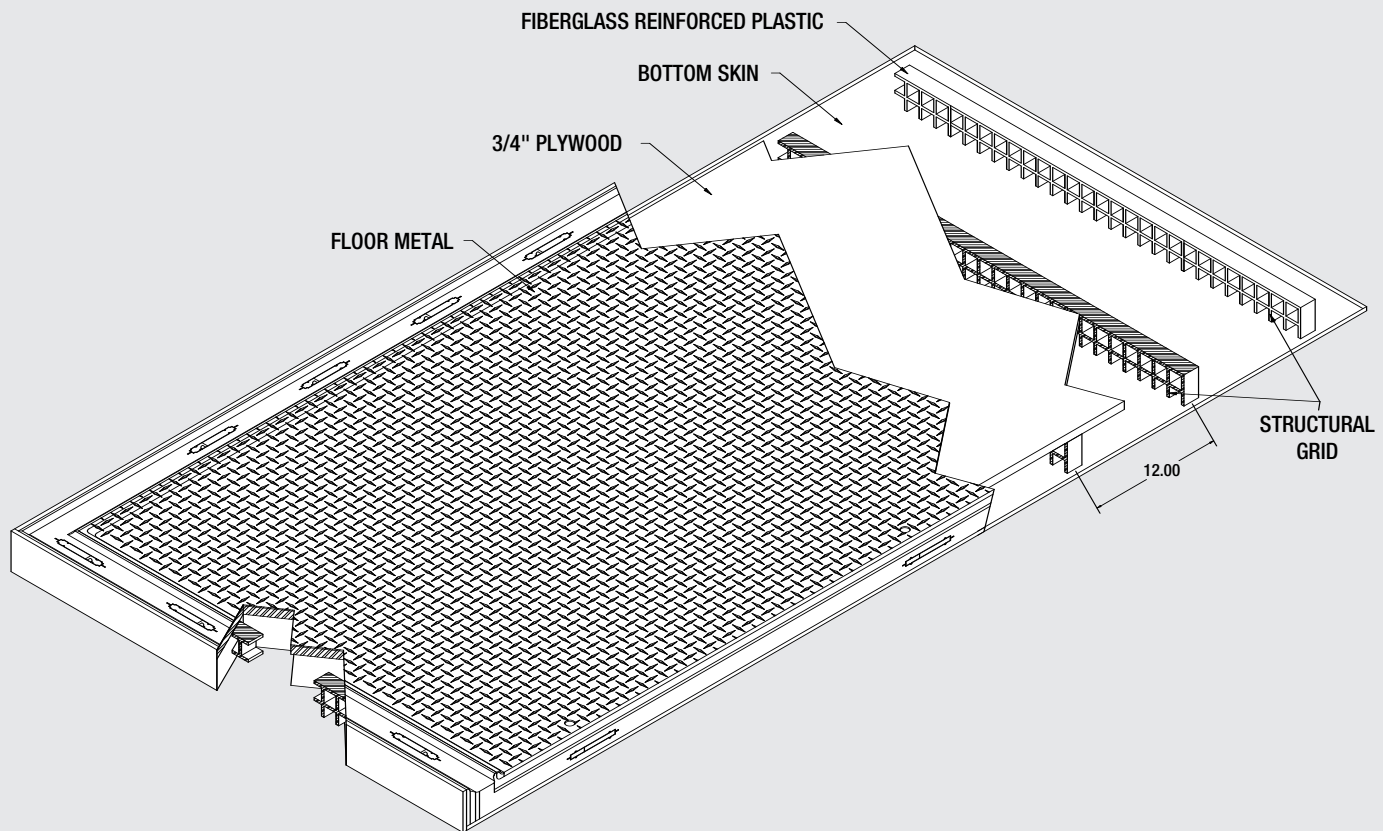

3745 ©2006 Harford - 10/06 Continuing product improvement may necessitate change of specifications without notice.



Harford

HARFORD
2129 Pulaski Hwy, P.O. Box 1026,
Aberdeen, MD 21001, USA
Ph: 800-638-7620 • Fax: 410-272-8508
Visit us online at www.harfordduracool.com

